

K tlači prijímame tieto formáty:



- Tlačové PDF musí byť v farebnom prevedení CMYK.
- Písma vložené alebo v krivkách.
- Verzia PDF nesmie byť vyššia ako 1.3.
- PDF ukladáme do európskeho štandardu PDF/X-1a.
- Orezové značky nesmú zasahovať do priestoru spadávky.
- Spadávky nastavíme minimálne na 3mm.



- JPG musí byť v farebnom prevedení CMYK.
- Uložený bez kompresie.
- Maximálna dĺžka strany nesmie presahovať 21 500px.
- Spadávky nastavíme minimálne na 3mm.



- EPS musí byť v farebnom prevedení CMYK.
- Všetky texty v krivkách.
- Orezové značky nesmú zasahovať do priestoru spadávky.
- Spadávky nastavíme minimálne na 3mm.



- TIF musí byť v farebnom prevedení CMYK.
- Uložený bez kompresie (LZW kompresia je povolená).
- Maximálna dĺžka strany nesmie presahovať 21 500px.
- Spád nastavíme minimálne na 3mm.

Nepoužívajte slovenskú diakritiku v názve súborov.
Nepoužívajte obrázky v farebnom prevedení RGB.
Preveďte Pantone farby do CMYK.



STIAHNUŤ ŠABLÓNY

.ai, .idml, .indd, .pdf, .eps

85x200 cm

+1 cm navrchu pre zasunutie do lišty



85x200 cm

+10 cm dole pre zasunutie do mechanizmu

100x200 cm

+1 cm navrchu pre zasunutie do lišty



100x200 cm

+10 cm dole pre zasunutie do mechanizmu

120x200 cm

+1 cm navrchu pre zasunutie do lišty



120x200 cm

+10 cm dole pre zasunutie do mechanizmu



Viditeľná plocha rollupu.



Plocha bude schovaná v mechanizme a lište rollupu, je vhodné, aby na oboch týchto plochách pokračovalo pozadie rolety (grafického motívu)

For printing we accept these formats:



- Printing PDF must be in coloured scope CMYK.
- Scripts inserted or in curves.
- PDF version can not be higher than 1.3.
- We save PDF in european standard PDF/X-1a.
- Cropping marks can not step in space for bleeds.
- Bleed will be set up at least on 3 mm.



- JPG must be in coloured scope CMYK.
- Saved without compression.
- Maximum length of side can not exceed 21 500 pixels.
- Bleed will be set up at least on 3 mm.



- EPS must be in coloured scope CMYK.
- All texts in curves.
- Cropping marks can not step in space for bleeds.
- Bleed will be set up at least on 3 mm.



- TIF must be in coloured scope CMYK.
- Saved without compression (LZW compression is allowed).
- Maximum length of side can not exceed 21 500 pixels.
- Bleed will be set up at least on 3 mm.

Do not use Czech diacritics in file's names.
Do not use images in coloured scope RGB.
Convert Pantone colours into CMYK.



DOWNLOAD TEMPLATES

.ai, .idml, .indd, .pdf, .eps

85x200 cm

+1 cm on top for slide into the bar



85x200 cm

+10 cm on bottom for slide into the mechanism

100x200 cm

+1 cm on top for slide into the bar




100x200 cm

+10 cm on bottom for slide into the mechanism

120x200 cm

+1 cm on top for slide into the bar

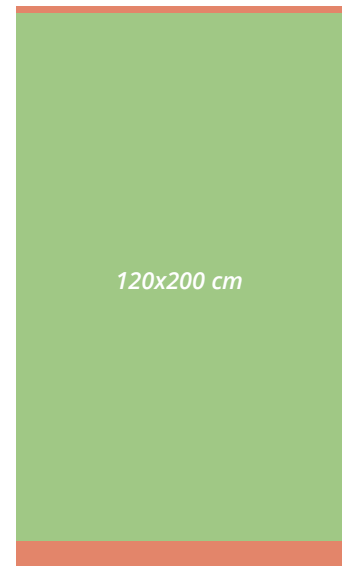

120x200 cm

+10 cm on bottom for slide into the mechanism



Visible surface of a rollup.



Surface will be hide in the mechanism and the bar of a rollup. It is appropriate to have continuing of roller's background on both surfaces (graphic motive).

Recommended resolution in reliance on viewer's distance from a rollup is 300>150 ppi.